

**This Page Is Inserted by IFW Operations  
and is not a part of the Official Record**

## **BEST AVAILABLE IMAGES**

**Defective images within this document are accurate representations of the original documents submitted by the applicant.**

**Defects in the images may include (but are not limited to):**

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORLED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 825 668 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
25.02.1998 Bulletin 1998/09

(51) Int. Cl.<sup>6</sup>: H01Q 1/36, H01Q 1/38,  
H01Q 1/40

(21) Application number: 97114592.5

(22) Date of filing: 22.08.1997

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE

(30) Priority: 22.08.1996 JP 221560/96

(71) Applicant:  
MURATA MANUFACTURING CO., LTD.  
Nagaokakyo-shi Kyoto-fu 226 (JP)

(72) Inventors:  
• Mandai, Harufumi  
Nagaokakyo-shi, Kyoto-fu (JP)  
• Tsuru, Teruhisa  
Nagaokakyo-shi, Kyoto-fu (JP)

(74) Representative:  
Schoppe, Fritz, Dipl.-Ing.  
Schoppe & Zimmermann  
Patentanwälte  
Postfach 71 08 67  
81458 München (DE)

### (54) Antenna and resonant-frequency-adjustment method therefor

(57) An antenna (10; 20; 30; 50) includes a spirally wound conductor (11; 21; 31; 51) composed of a copper wire or a covered copper wire, and a covering material (12; 23; 32; 52) consisting essentially of a resin or a resin mixture with  $1 < \epsilon \leq 10$ . At least part of the conductor is covered with the covering material. One end of the conductor leads to the outside of the covering material to form an external terminal (33; 53). Another end of the conductor forms a free end (14; 54) in the covering material. In addition, a method for adjusting the resonant frequency of the antenna includes at least the step of changing a winding interval of a part of the conductor which is not covered with the covering material or the step of covering with the covering material a part of the conductor which is not covered with the covering material, or both. Furthermore, the antenna preferably satisfies the following numerical expression:  $1.3 \leq l/a \cdot n \leq 4$  where  $l$  represents the coil length of said conductor;  $a$  represents the diameter of said conductor; and  $n$  represents the number of turns of said conductor.

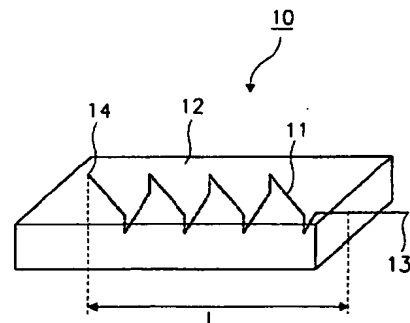


FIG. 1

EP 0 825 668 A2

## Description

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates to antennas and resonant-frequency-adjustment methods, therefor, and in particular, to an antenna and a resonant-frequency-adjustment method therefor which are for use in a portable radio.

#### 2. Description of the Related Art

Whip antennas are conventionally used for portable radio devices such as liquid-crystal televisions (90 to 800 MHz) and FM radios (75 to 90 MHz) (88 to 108 MHz in the U.S.) (hereinafter referred to generally as "portable radios"). Loop antennas are used for pagers.

A conventional whip antenna must be extended for use. In a frequency band equal to or less than 1 GHz, the length of the whip antenna needs to be 7.5 cm or longer, which makes it unstable when setting up a portable radio, and presents a problem when the radio falls.

### SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a small-sized antenna which can be built into the casing of a portable radio.

To this end, according to an aspect of the present invention, the foregoing object may be achieved through provision of an antenna in which the whole or part of a coiled conductor composed of a metallic wire is covered with a covering material comprising a resin, or a mixture of such a resin and a filler, having a dielectric constant  $\epsilon$  where  $1 < \epsilon \leq 10$ .

According to another aspect of the present invention, the foregoing object may be achieved through provision of an antenna in which the whole or part of a base member composed of a dielectric material, having a conductor wound on the surface thereof, is covered with a covering material composed of a resin or a mixture of the resin and a filler having a dielectric constant  $\epsilon$  where  $1 < \epsilon \leq 10$ .

Preferably, the antennas satisfy the following numerical expression:  $1.3 \leq l/a \cdot n \leq 4$  where  $l$  represents the coil length of the conductor;  $a$ : the diameter of the conductor; and  $n$ : the number of turns of the conductor.

In each antenna one end of the conductor may be connected to an input/output terminal formed on the surface of the covering material.

According to a further aspect of the present invention, the foregoing object may be achieved through provision of a method for adjusting the resonant frequency of the antenna, in which the method comprises either the step of changing a winding interval for a part of the

conductor which is not covered with the covering material, or the step of covering with a mixture of a resin and a filler a part of the conductor which is not covered with the covering material.

According to the foregoing aspects of the present invention, a coiled conductor is covered with a covering material composed of a resin or a mixture of the resin and a filler, the covering material having a dielectric constant  $\epsilon$  expressed as  $1 < \epsilon \leq 10$ . The covering material has a wavelength shortening effect which can electrically shorten the coil length of the conductor. Accordingly, the desired characteristics of an antenna are satisfied, and compared with a conventional whip antenna, the antenna can be reduced in size to 1/9 or less of volume of a conventional whip antenna in a frequency band at or below 1 GHz, and can be built into the casing of a portable radio.

By satisfying the relation  $1.3 \leq l/a \cdot n \leq 4$ , the characteristics of an antenna can be improved without enlarging the size of the antenna.

Since a coiled conductor is wound on the surface of a base member, changes in the cross-sectional shape of the winding, taken perpendicular to the winding axis, and changes in its winding pitch, can be avoided. Therewith, undesirable changes in the antenna characteristics can be reduced.

If the surface of a covering material is provided with an input/output terminal, the antenna can be easily surface-mounted.

The resonant frequency of the antenna can be adjusted by either the step of changing a winding interval of the conductor which is not covered with the covering material, or the step of covering with a resin, or a mixture of a resin and filler, a part of the conductor which is not covered with the covering material. Thus, the antenna can be adjusted with the antenna mounted on a mounting board.

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view illustrating an antenna according to a first embodiment of the present invention.

Fig. 2 is a perspective view illustrating an antenna according to a second embodiment of the present invention.

Fig. 3 is a perspective view illustrating an antenna according to a third embodiment of the present invention.

Figs. 4A, 4B and 4C are perspective views illustrating respective modifications of a base member included in the antenna shown in Fig. 2.

Fig. 5 is a perspective view of an antenna according to a fourth embodiment of the present invention.

# DESCRIPTION OF EMBODIMENTS OF THE INVENTION

Fig. 1 shows a perspective view of an antenna according to a first embodiment of the present invention.

The antenna 10 includes a spirally wound conductor 11 composed of a copper wire or a covered copper wire, and a covering material 12 composed of a resin or a mixture of the resin and a filler. The whole conductor 11 is covered with the covering material 12. One end of the conductor 11 leads to the outside of the covering material 12 to form an external terminal 13. Another end of the conductor 11 forms a free end 14 inside the covering material 12.

The following Table 1 shows the resonant frequency ( $f_0$ ) and relative bandwidth ( $BW/f_0$ : bandwidth/resonant frequency) of the antenna 10 obtained when materials with a dielectric constant ( $\epsilon$ ) of 1 to 14 are used as the covering material 12. The materials used as the covering material 12 are a fluororesin ( $\epsilon$ :2), an epoxy resin ( $\epsilon$ :4), and a mixture ( $\epsilon$ :6 to 14) of the epoxy resin and a filler chiefly composed of titanium.

Table 1

$\epsilon$	$f_0$ (MHz)	$BW/f_0$ (%)
1	800	6.0
2	710	5.9
4	630	5.8
6	555	5.7
8	500	5.6
10	480	5.4
12	470	5.0
14	460	4.6

From the results of Table 1 it is understood that an antenna having the materials with dielectric constants of 1 to 10 exhibits a small change in the ratio between the relative bandwidth and the resonant frequency in accordance with a change in the resonant frequency. However, the materials having dielectric constants larger than 10 exhibit a large change in the ratio between the relative bandwidth and the resonant frequency in accordance with a change in the resonant frequency. Consequently, it is found that a resin or a mixture of the resin and a filler with  $1 < \text{dielectric constant} \leq 10$  is suitable for the covering material 12. The dielectric constant = 1 represents a condition without the covering material 12, and is accordingly omitted.

The reason why an increase in the dielectric constant increases a change in the ratio between relative bandwidth and the resonant frequency with respect to a

change in the resonant frequency is that a capacitive component is added in parallel to the coiled conductor 11 included in the antenna 10, and the capacitive component and the inductive component of the conductor 11 constitute an antiresonant point narrowing the bandwidth. Accordingly, a suitable bandwidth for the antenna can be provided by adjusting the dielectric constant of the covering material 12.

The following Table 2 shows the resonant frequency ( $f_0$ ) and relative bandwidth ( $BW/f_0$ : bandwidth/resonant frequency) of the antenna 10 obtained when  $l/a \cdot n$  (where  $l$ : the coil length of a conductor;  $a$ : the diameter of the conductor; and  $n$ : the number of turns of the conductor) is set from 1.1 to 6.0. Constant values are  $a$ : 0.3(mm),  $n$ : 22(turns) in this example.

Table 2

$l$	$l/a \cdot n$	$f_0$ (MHz)	$BW/f_0$ (%)
6.6	1.1	200	1.2
7.2	1.2	210	2.0
7.8	1.3	220	3.8
12	2.0	250	5.5
18	3.0	300	6.0
24	4.0	350	6.5
30	5.0	400	6.8
36	6.0	450	7.0

From the results in Table 2 it is understood that, when  $l/a \cdot n$  decreases to less than 1.3, the relative bandwidth ( $BW/f_0$ ) decreases to sharply narrow the bandwidth. This reason is that an increase in the floating capacitance of the coiled conductor 12 causes the antiresonant point to approach the resonant point. In addition, when  $l/a \cdot n$  increases to more than 4, there is little additional change in the ratio between the relative bandwidth and the resonant frequency. In other words, it is understood that, even if the coil length is increased by enlarging the shape of the antenna, it is difficult to improve the antenna characteristics any further.

Specifically, when a comparison in size is made between a whip antenna having a resonant frequency of 47.2 MHz and the antenna 10 having the same frequency in which the conductor 11 is covered with the covering material 12 consisting essentially of a mixture of an epoxy resin having a dielectric constant of 6 and a filler chiefly composed of titanium, it is found that the whip antenna is approximately 158 cm long, while the antenna 10 is 5 mm wide, 8 mm deep, and 2.5 mm high, which is approximately 1/200 of volume of a conventional whip antenna.

Also in a frequency bandwidth at or below 1 GHz in which the length of the whip antenna needs to be 7.5 cm

or more, the antenna 10 is  $1/9$  or less in size.

According to the first embodiment, by using a material with  $1 < \text{dielectric constant} \leq 10$ , the desired characteristics of an antenna are satisfied, and when compared with a conventional whip antenna, the size of the antenna can be reduced to  $1/9$  in a frequency band equal to or less than 1 GHz. Accordingly, the antenna can be built into the casing of a portable radio.

In addition, by setting  $1/a \cdot n$  in the range of 1.3 to 4, the characteristics of the antenna can be improved without enlarging the size of the antenna. For example, its bandwidth can be broadened. The mentioned advantages can be sufficiently obtained when the number  $n$  of turns is 5 to 100.

Fig. 2 shows a perspective view of an antenna according to a second embodiment of the present invention.

The antenna 20 includes: a base member 22 comprising a dielectric material chiefly composed of barium oxide, aluminum oxide and silica and having a wound conductor 21 composed of copper or a copper alloy on its surface; and a covering material 23 comprising a mixture of an epoxy resin and a filler chiefly composed of titanium. The entire conductor 21 and base member 22 are covered with the covering material 23. One end of the conductor 21 leads to the outside of the covering material 23 to form an external terminal 24. Another end of the conductor 21 forms a free end 25 inside the covering material 23.

According to the second embodiment, spirally winding a conductor on the surface of a base member avoids inadvertent changes in the cross-sectional shape of the wound conductor, taken perpendicular to the winding axis, and in the winding pitch. Therewith, inadvertent changes in the antenna characteristics are avoided.

Fig. 3 shows a perspective view of an antenna according to a third embodiment of the present invention.

Compared with the antenna 10 according to the first embodiment, the antenna 30 differs in that one end of a conductor 31 leads to the surface of a covering material 32, and is connected to a signal input/output terminal 33 for connecting the conductor 31 with an external transmitter and/or receiver circuit.

According to the third embodiment, the input/output terminal is formed on the surface of the covering material 32. Thus, the surface mounting of the antenna can be easily performed.

In the first to third embodiments, a coiled conductor, or a conductor and a base member on which this conductor is spirally wound, is entirely covered with a covering material having a dielectric constant  $\epsilon$  expressed as  $1 < \epsilon \leq 10$ . However, the covering material may only partially cover the coiled conductor or the conductor and the base member on which the conductor is spirally wound. In such an arrangement, the resonant frequency of an antenna can be adjusted by changing a winding interval of a part of the conductor which is not

covered with the covering material, or by covering with a resin, or a mixture of a resin and filler a part of the conductor which is not covered with the covering material, or both. Such an adjustment can be performed with the antenna mounted on a mounting board.

Also, the first to third embodiments have described cases in which a filler chiefly composed of titanium is used as a filler included in a covering material. However, fillers which are chiefly composed of alumina, barium titanate and so forth may be used.

In addition, cases in which one conductor is used have been described. However, a plurality of conductors arranged in parallel may be included. This enables an antenna to have a plurality of resonant frequencies in accordance with the number of conductors. Thus, one antenna can be used in a plurality of bands.

The second embodiment has described a case in which a base member on which a conductor is wound is plate-shaped. However, in modified embodiments as shown in Fig. 4A and Fig. 4B, spaces 43 are formed in base members 41 and 42. When the space is formed in the base member, the dielectric constant of the inside of the base member decreases. Thus, an antiresonant point can be moved away from a resonant point, thereby reducing a corresponding decrease in the bandwidth.

In addition, as shown in Fig. 4B and Fig. 4C, the surfaces of the base member 42 and a base member 44 may be provided with grooves 45. When grooves for winding the conductor are formed on the surface of a base member, the precision of the position where the conductor is wound can be improved. Thus, a change in antenna characteristics can be suppressed.

Fig. 5 shows a perspective view of an antenna according to a fourth embodiment of the present invention.


Compared with the antenna 10, 20 and 30 according to the first, second and third embodiments, the antenna 50 comprises a plurality of dielectric ceramic layers. Conductor 51 having a free end 54 and another end connected to a signal input/output terminal 53 is directly covered with a resin 52 or a mixture of a resin and a filler which has a dielectric constant  $\epsilon$  where  $1 < \epsilon \leq 10$ .

It is desired that each connecting portion (not shown) of each dielectric ceramic layer is not coated with the resin or the mixture of the resin and the filler in order not to prevent adjacent the layers from electrically connecting each other.


## Claims

1. An antenna (10; 30; 50) in which a coiled conductor (11; 31; 51) composed of a metallic wire is at least partially covered with a covering material (12; 32; 52) comprising a resin or a mixture of a resin and a filler having a dielectric constant  $\epsilon$  where  $1 < \epsilon \leq 10$ .
2. An antenna (20) in which a base member (22; 41;


- 42; 44) composed of a dielectric material, having a conductor (21) wound on the surface thereof, is at least partially covered with a covering material (23) composed of a resin or a mixture of a resin and a filler having a dielectric constant  $\epsilon$  where  $1 < \epsilon \leq 10$ . 5
3. An antenna (10; 20; 30; 50) according to Claim 1 or Claim 2, wherein said antenna satisfies the following numerical expression:  $1.3 \leq l/a \cdot n \leq 4$  where  $l$  represents the coil length of said conductor;  $a$  represents the diameter of said conductor; and  $n$  represents the number of turns of said conductor. 10
  4. An antenna (10; 20; 30; 50) according to Claim 3, wherein the number  $n$  of said turns of said conductor is substantially 5 to 100. 15
  5. An antenna (30) according to one of Claims 1 to 4, wherein one end of said conductor (31) is connected to a terminal (33) formed on the surface of said covering material (32). 20
  6. An antenna according to Claim 2, wherein said base member has an aperture (43) which extends within said conductor (41; 42). 25
  7. An antenna according to Claim 2 or 6, wherein said base member (42; 44) has a groove (45) therein for defining a winding path of said conductor. 30
  8. An antenna (50) according to claim 1, wherein said antenna comprises a base having a plurality of dielectric ceramic layers. 35
  9. An antenna (50) according to claim 8, wherein said metallic wire itself is directly covered with said covering material. 40
  10. A method for adjusting the resonant frequency of an antenna (10; 20; 30; 50) in which at least part of a coiled conductor (11; 21; 31; 51) composed of a metallic wire is covered with a covering material (12; 23; 32; 52) comprising a resin or a mixture of a resin and a filler having a dielectric constant  $\epsilon$  where  $1 < \epsilon \leq 10$ , wherein said method comprises the step of changing a winding interval of a part of said conductor which is not covered with said covering material. 45
  11. A method according to Claim 10, wherein said method further comprises the step of covering with said covering material a part of said conductor which was not previously covered with said covering material. 50
  12. A method for adjusting the resonant frequency of an antenna (10; 20; 30; 50) in which at least part of a coiled conductor (11; 21; 31; 51) composed of a metallic wire is covered with a covering material (12; 23; 32; 52) comprising a resin or a mixture of a resin and a filler having a dielectric constant  $\epsilon$  where  $1 < \epsilon \leq 10$ , wherein said method comprises the step of covering with said covering material a part of said conductor which was not previously covered with said covering material. 55
  13. A method for adjusting the resonant frequency of an antenna in which at least part of a base member (22; 41; 42; 44) composed of a dielectric material, having a conductor (21) wound on the surface thereof, is covered with a covering material (23) composed of a resin or a mixture of a resin and a filler having a dielectric constant  $\epsilon$  where  $1 < \epsilon \leq 10$ , wherein said method comprises the step of changing a winding interval of a part of said conductor which is not covered with said covering material.
  14. A method according to Claim 13, wherein said method further comprises the step of covering with said covering material a part of said conductor which was not previously covered with said covering material.
  15. A method for adjusting the resonant frequency of an antenna in which at least part of a base member (22; 41; 42; 44) composed of a dielectric material, having a conductor (21) wound on the surface thereof, is covered with a covering material (23) composed of a resin or a mixture of a resin and a filler having a dielectric constant  $\epsilon$  where  $1 < \epsilon \leq 10$ , wherein said method comprises the step of covering with said covering material a part of said conductor which is not covered with said covering material.
  16. A method according to Claim 10 or Claim 13, wherein said antenna satisfies the following numerical expression:  $1.3 \leq l/a \cdot n \leq 4$  where  $l$  represents the coil length of said conductor;  $a$  represents the diameter of said conductor; and  $n$  represents the number of turns of said conductor.
  17. A method according to Claim 16, wherein the number  $n$  of said turns of said conductor is substantially 5 to 100.
  18. A method according to Claim 13, wherein said base member (41; 42) has an aperture (43) which extends within said conductor.
  19. A method according to Claim 13 or 18, wherein said base member (42; 44) has a groove (45) therein for defining a winding path of said conductor.

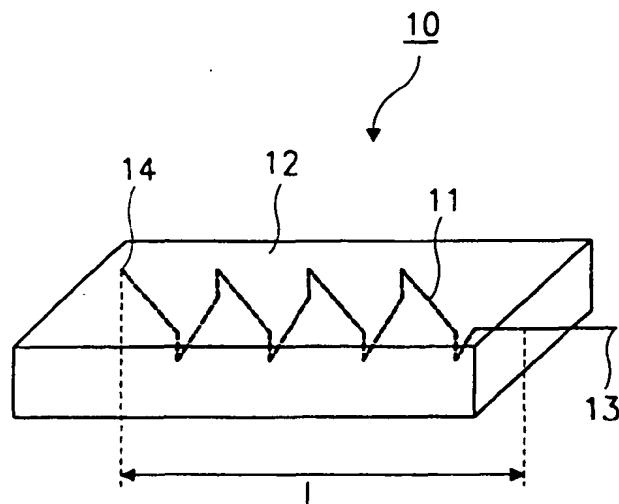

**FIG. 1**

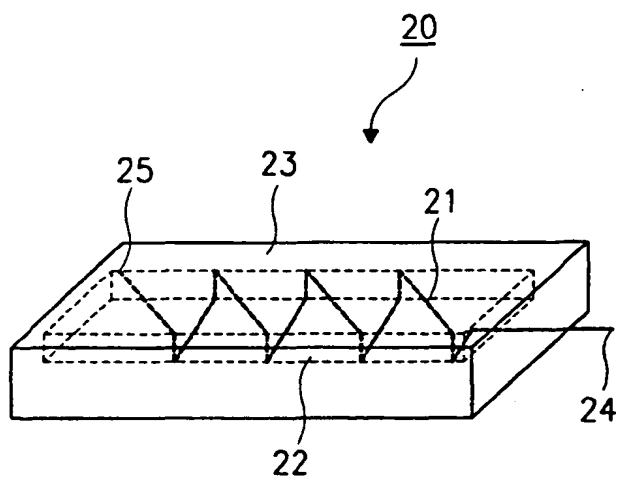


**FIG. 2**

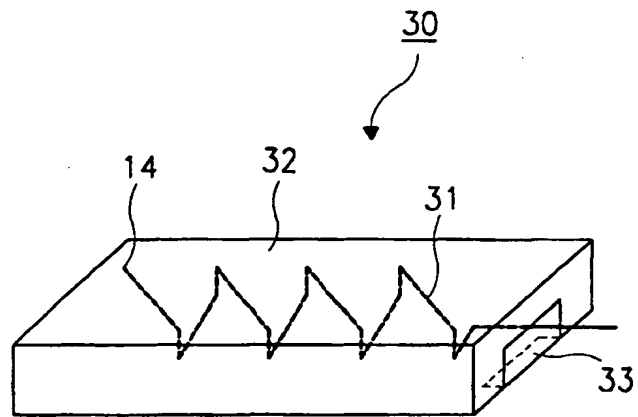


**FIG.3**




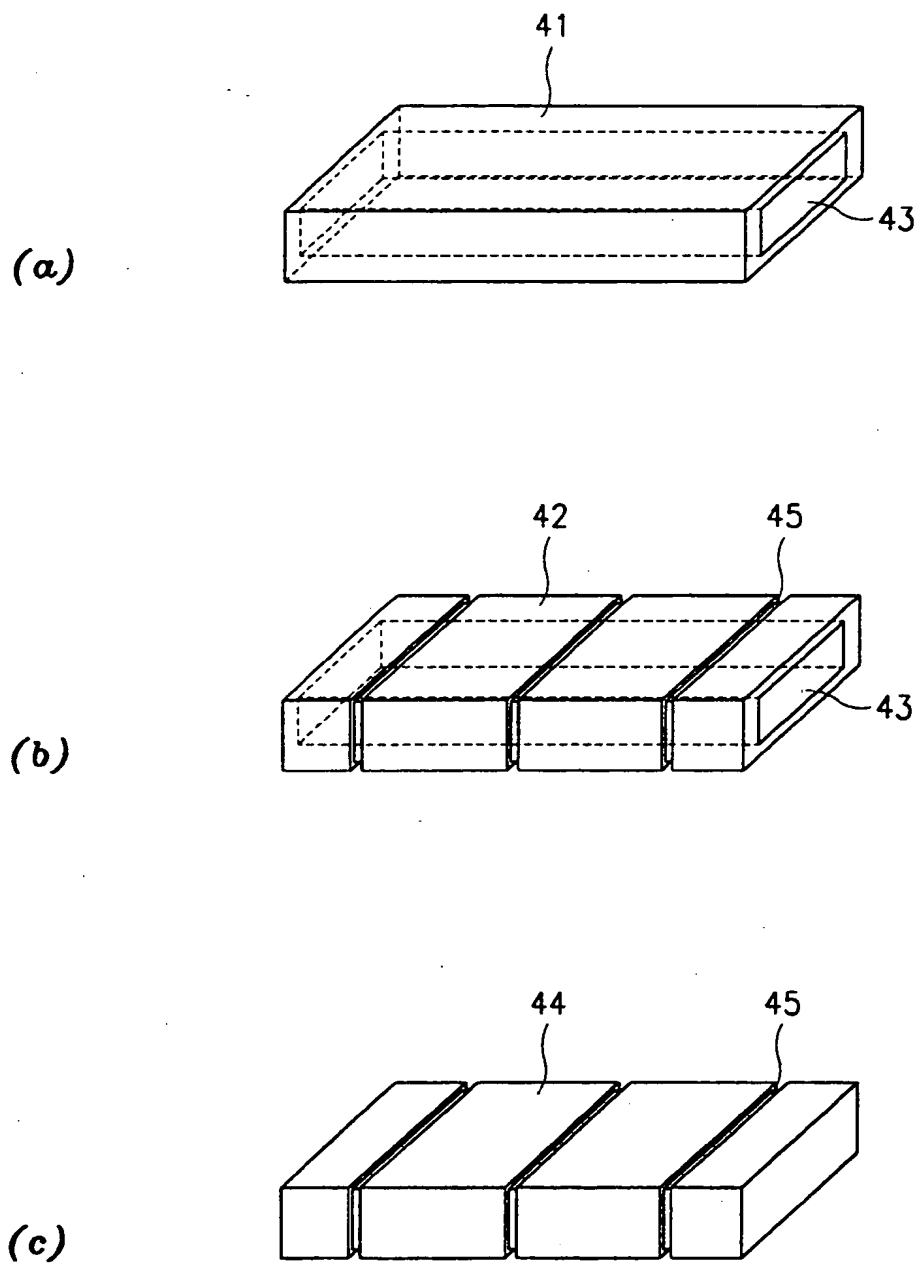

**FIG. 4**

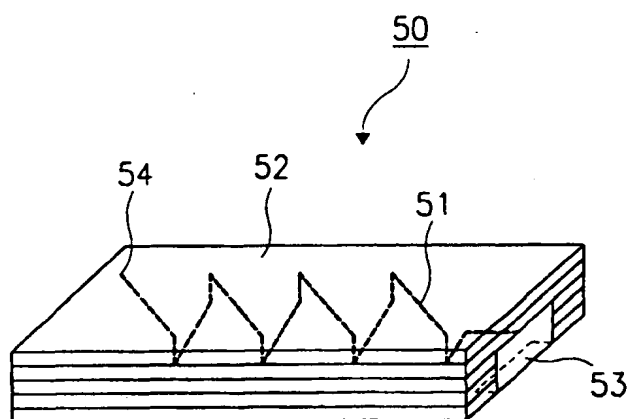

**FIG. 5**



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 825 668 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
19.05.1999 Bulletin 1999/20

(51) Int. Cl.<sup>6</sup>: **H01Q 1/36**, H01Q 1/38,  
H01Q 1/40

(43) Date of publication A2:  
25.02.1998 Bulletin 1998/09

(21) Application number: **97114592.5**

(22) Date of filing: **22.08.1997**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE**

(30) Priority: **22.08.1996 JP 221560/96**


(71) Applicant:  
**MURATA MANUFACTURING CO., LTD.**  
**Nagaokakyo-shi Kyoto-fu 226 (JP)**

(72) Inventors:  
• **Mandai, Harufumi**  
**Nagaokakyo-shi, Kyoto-fu (JP)**  
• **Tsuru, Teruhisa**  
**Nagaokakyo-shi, Kyoto-fu (JP)**

(74) Representative:  
**Schoppe, Fritz, Dipl.-Ing.**  
**Schoppe & Zimmermann**  
**Patentanwälte**  
**Postfach 71 08 67**  
**81458 München (DE)**

**(54) Antenna and resonant-frequency-adjustment method therefor**

(57) An antenna (10; 20; 30; 50) includes a spirally wound conductor (11; 21; 31; 51) composed of a copper wire or a covered copper wire, and a covering material (12; 23; 32; 52) consisting essentially of a resin or a resin mixture with  $1 < \epsilon \leq 10$ . At least part of the conductor is covered with the covering material. One end of the conductor leads to the outside of the covering material to form an external terminal (33; 53). Another end of the conductor forms a free end (14; 54) in the covering material. In addition, a method for adjusting the resonant frequency of the antenna includes at least the step of changing a winding interval of a part of the conductor which is not covered with the covering material or the step of covering with the covering material a part of the conductor which is not covered with the covering material, or both. Furthermore, the antenna preferably satisfies the following numerical expression:  $1.3 \leq l/a \cdot n \leq 4$  where  $l$  represents the coil length of said conductor;  $a$  represents the diameter of said conductor; and  $n$  represents the number of turns of said conductor.



**FIG. 1**

**EP 0 825 668 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 11 4592

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
P,X	EP 0 759 646 A (MURATA MANUFACTURING) 26 February 1997 * page 2, line 52 - line 54; claims 1-10; table 1 *	1,2,10, 12,13,15	H01Q1/36 H01Q1/38 H01Q1/40
A	EP 0 706 231 A (MITSUBISHI) 10 April 1996  * column 4, line 35 - column 6, line 51; figures 1,2A,B,4 * * column 7, line 46 - column 8, line 46; figures 7-11 *	1,2,10, 12,13,15	
P,A	EP 0 771 047 A (MURATA MANUFACTURING) 2 May 1997  * column 1, line 38 - column 2, line 19 * * column 3, line 28 - column 6, line 36; figures 3-5 *	1-4,10, 12,13, 15-17	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H01Q
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>26 March 1999</b>	Examiner <b>Angrabeit, F</b>
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 11 4592

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-03-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0759646 A	26-02-1997	JP 9051221 A	18-02-1997
EP 0706231 A	10-04-1996	JP 8107304 A	23-04-1996
		AU 673976 B	28-11-1996
		AU 3281195 A	18-04-1996
		CN 1126382 A	10-07-1996
		US 5541610 A	30-07-1996
EP 0771047 A	02-05-1997	JP 9121113 A	06-05-1997